

# Sunpak


## DSLR67 LED macro ring light for digital SLR cameras

### Features

Now get professionally lit macro photographs in true color at up to 1:1 (actual size) or greater magnification\* for ultra close-ups with stunning detail. Unlike ordinary macro ring lights requiring a special adapter to fit lenses of different filter attachment sizes, the Sunpak DSLR67 LED macro ring light works with any lens with a maximum diameter of 67 mm. Just slide the ring light into your camera's hot shoe and adjust its flexible cable so the ring light aligns with the front of your lens. That's it. Turn it on, focus and shoot! Its steady LED illumination makes it easy to pre-visualize every photo before releasing the shutter. Of course, a tripod is recommended to ensure sharp, steady photos. The result? Great shadow-less images for natural, eye-catching close-ups, every time. You can also easily position the ring light to either side or above the lens for soft shadows or detail enhancement. It's easy to try different lighting effects. The Sunpak DSLR67 LED macro ring light also has two power settings, high and low, for just the right amount of light for any close-up subject.

### Instructions

1. Open the battery box (a) by sliding out the battery cover (b) and insert 3 AAA batteries (not included) as illustrated. Close by sliding back in position as shown.
2. Insert DSLR67 into the hot shoe mount of your camera and tighten the locking ring (c) to secure.
3. Bend the flexible arm (d) towards the front of camera lens (e) to position the ring light (f) over the lens barrel to prevent vignetting. The arm can also be positioned to either side of the lens or above to create different lighting effects.
4. Slide the power switch (g) from "OFF" to "LOW" for low light mode. If the subject requires additional light, slight the switch to the "HIGH" position.
5. Switch to the DSLR67 LED macro right light to the "OFF" when not in use.
6. The DSLR67 LED macro ring light may also be attached to a standard 1/4" x 20 tripod or light stand mount.

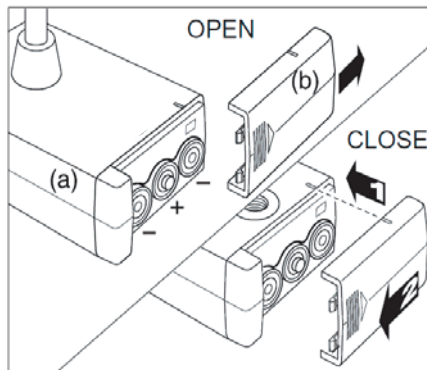

### Sunpak One Year Limited Warranty

This Sunpak product has been carefully manufactured, accurately adjusted, inspected and thoroughly tested before shipment to assure you of the highest quality.

Should this product require service, we will repair or replace, at our option, any part or the product itself, which our examination shows to be defective in material or workmanship. This warranty does not apply to wear and tear associated with the normal use of the product. This warranty is non-transferable.

Repairs will be made to the product at no charge, under the terms of the warranty as stated above, only when accompanied by a dated and itemized bill of sale and nominal handling charge.

Be certain to follow all assembly and/or operating instructions with this product. This warranty is not valid if the product has been misused or damaged in any way that is beyond our control or through normal wear and tear associated with use. This warranty applies only to the product and we are not responsible in any way for losses, damages or any inconvenience caused by equipment failure.

Some states do not allow the exclusion or limitation of consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may have other rights which may vary from state to state.

Should service be required, the product should be carefully packed (in the original packaging if possible) and sent, prepaid and insured, along with a check or money order for \$4.95 (shipping and handling), to the address listed below. A note briefly describing the nature of the defect should also be enclosed to expedite handling. **Proof of purchase and payment for shipping and handling must be included for all warranty repairs.**

Sunpak, ToCAD America Inc., 53 Green Pond Road, Rockaway, NJ 07866, Attention Service Department

### Specifications

- Illumination: 12 natural colored LEDs
- Power levels: high or low settings
- Color temperature: 5500°– 6500°
- Effective distance: 2"– 20"
- Power source: 3 AAA batteries (not included)
- Battery types: Alkaline, Lithium, NiMH, NiCd
- Ring light inner diameter: 67mm
- Ring light outer diameter: 95mm
- Battery box: 2.5" x 1.6" x 2.0"
- Flexible arm: 0.24" x 10.25"
- Weight: 4.2 oz (without batteries)
- Camera mount: standard hot shoe w/locking ring
- Tripod mount: 1/4" - 20 tripod socket

\*Close-up magnification depends upon camera and lens used.  
Product design and specifications subject to change without notice.

**SUNPAK®**  
s u n p a k . c o m